

# 350L TANK SHOWER

**MODEL: TS350**

Suitable for all climates and manufactured to ANSI Z358.1-2014 and EN15154 standards, this tank shower guarantees over 5 minutes of tepid water without the need of a mains water supply. The unit is completely corrosion resistant and suitable for hazardous or non-hazardous environments. Comes with water level indicator, temperature display and testing lever as standard.

## KEY FEATURES

- Self-contained
- Manufactured in house, in the UK
- Photoluminous pictorial signs
- One-piece insulated GRP header tank



**MADE IN BRITAIN**

\*Shown with optional eye wash, panelling & foot platform

## OPERATING CONDITIONS

**WATER SUPPLY PRESSURE** 0.5 - 6 bar  
**TEMPERATURE** -25°C to +60°C (water chiller recommended for temperatures above 35°C)

## TECHNICAL DETAILS

**INLET CONNECTION** 1" BSPM (flanged options available)  
**SHOWER DRAIN OUTLET CONNECTION - if fitted** 2" BSPF (flanged options available)  
**SCREENED OVERFLOW** 40mm PVC-U  
**SHOWER FLOW RATE** 76lpm  
**EYEBATH FLOW RATE** Min 1.5lpm  
**BALL FLOAT VALVES for quick refill** 2 x 3/4" stainless valves with 6" plastic floats  
**SHOWER OPERATION** Panic bar (GRP foot platform as option)  
**EYEBATH OPERATION** Lift lid (stainless foot operation as option)  
**SIGNAGE** Self-adhesive photoluminous pictorial sign

## MATERIAL DETAILS

**HEADER TANK** 350L green insulated GRP (other colours available)  
**HEADER TANK LID** White insulated GRP  
**SHOWER FRAME** 304 stainless steel as standard (316 as option)  
**OPERATING VALVES** Stainless steel  
**SHOWER ROSE** Yellow - ABS (stainless as options)  
**PANIC BAR/TESTING LEVER** Stainless steel (powder coated red for high visibility)  
**PANELLING - if fitted** Side & rear - green GRP  
**SHOWER PLATFORM - if fitted** Yellow non-slip GRP  
**OVERHEAD SUN CANOPY - if fitted** White insulated GRP  
**EYEBATH - if fitted** Yellow GRP + 2 low pressure nozzles  
**EYEBATH FOOT TREADLE - if fitted** Stainless steel (powder coated red for high visibility)  
**TEMPERATURE GAUGE - if fitted** Stainless steel - 150mm diameter  
**WATER HEATER - if fitted** 2.4Kw (Non-hazardous), 3Kw (ATEX)

[www.aqua-safety.com](http://www.aqua-safety.com)



Aqua Safety Showers International Ltd,  
Redgate Road, South Lancashire Industrial Estate,  
Ashton-in-Makerfield, Wigan, WN4 8DT. UK



sales@aquasafety.com




+44 (0) 1942 318096




VAT No: 259714570  
Registration No: 10427026

## OPTIONAL EXTRAS



## TECHNICAL DRAWINGS

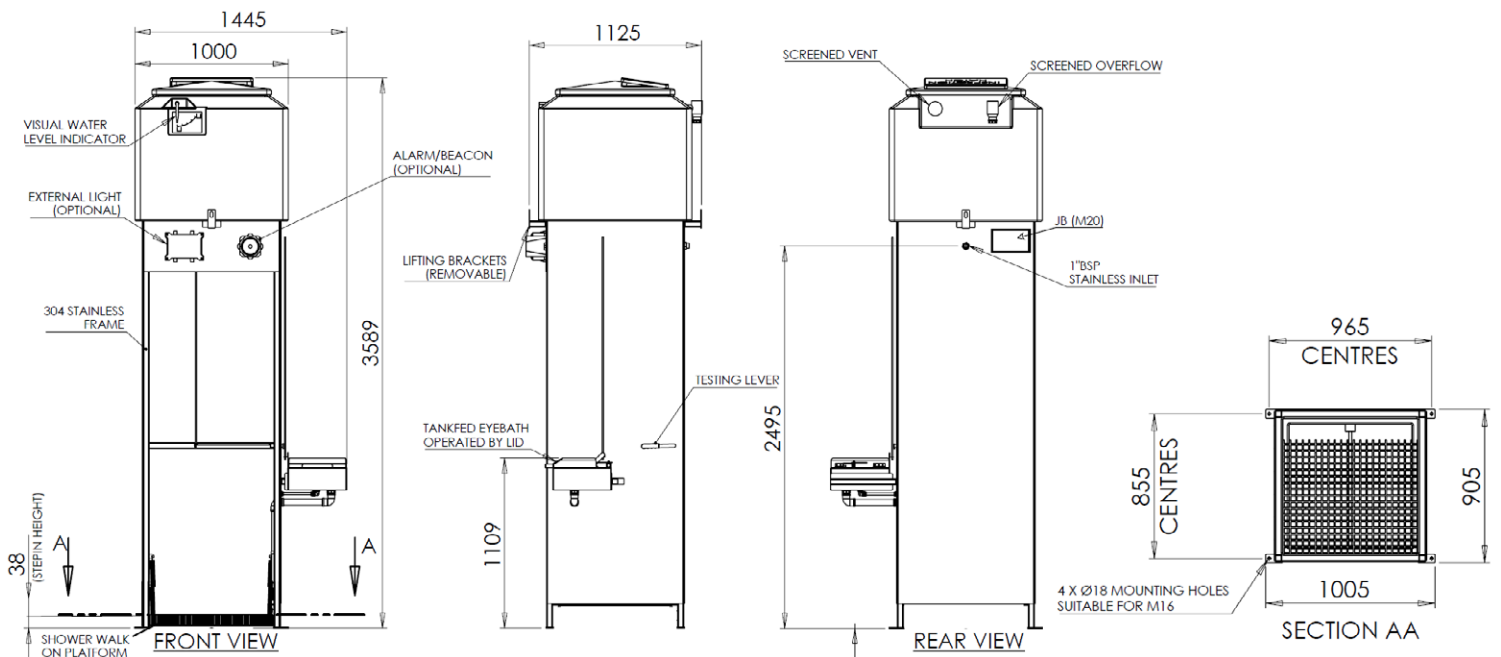

[www.aqua-safety.com](http://www.aqua-safety.com)



Aqua Safety Showers International Ltd,  
 Redgate Road, South Lancashire Industrial Estate,  
 Ashton-in-Makerfield, Wigan, WN4 8DT. UK



sales@aqu-safety.com



+44 (0) 1942 318096



VAT No: 259714570  
 Registration No: 10427026